

Energy efficiency investment and management for subway stations

P. Carpentier, J.-Ph. Chancelier, M. De Lara,
N. Khmarou and T. Rigaut

EFFICACITY
CERMICS, ENPC
LISIS, IFSTTAR

November 30, 2016



Optimization for subway stations

Paris subway system energy consumption =
 $\frac{1}{3}$ stations + $\frac{2}{3}$ trains

Subway stations have recoverable **energy ressources**

We use **optimization** to harvest **unexploited energy ressources** and **manage** the energy efficiency **investments**



Outline


- 1 Improving energy efficiency of subway stations
 - Subway stations energy mix
 - Energy management system
- 2 Stochastic optimal batteries management
 - Battery intraday control
 - Investment management
 - Investment/Control decomposition
- 3 Time decomposition strategy and first results
 - Resolution method: Bilevel Stochastic Dynamic Programming
 - Preliminary numerical results




Subway stations energy mix




Subway stations typical energy consumption

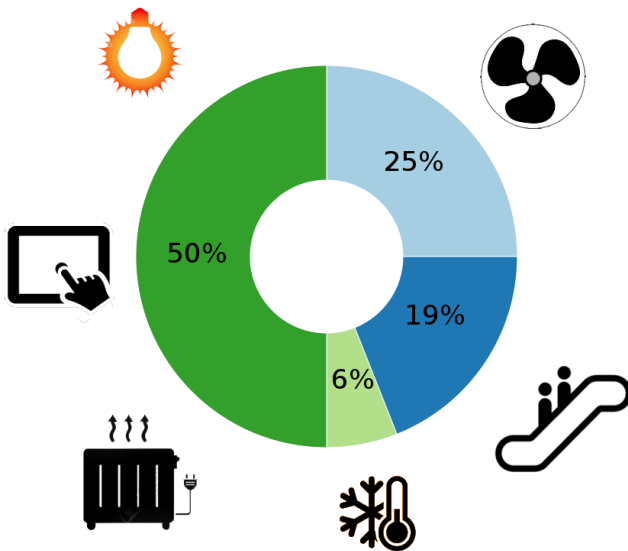

Subway stations have unexploited energy resources

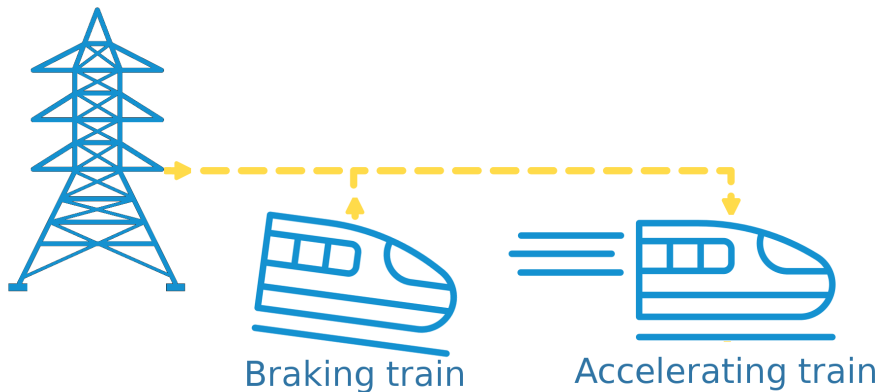


Energy recovery requires a buffer

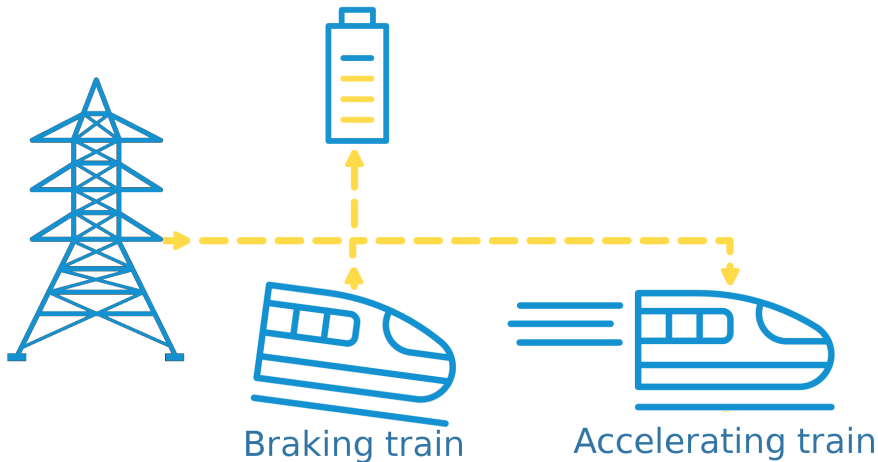

Subways braking energy is unpredictable


Multiple braking energy realizations

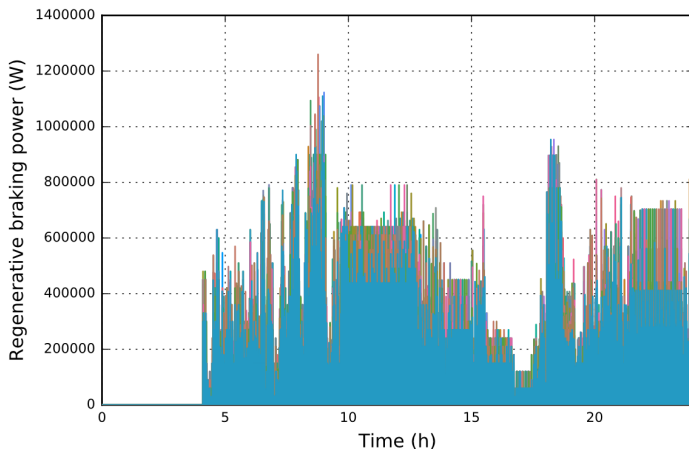

Energy management system



Microgrid concept for subway stations

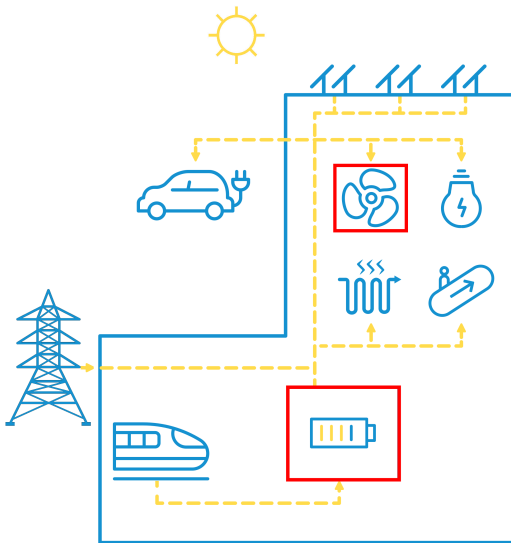

Efficacity © NEWords



efficacity
Efficacité des Points
d'Intervention

Previous results of stations energy management

We control ventilations and a battery

- Time horizon: 24h
- Time discretization: 20 seconds
- Battery capacity: 80kWh
- Uncertainty: 100 braking energy scenarios, deterministic demand



Comparison of 2 algorithms:

	MPC	SDP
Offline comp. time	0	1h
Online comp. time	[10s,200s]	[0s,1s]
Av. economic savings	-27.3%	-30.7%





Air quality comparison


Reference case:

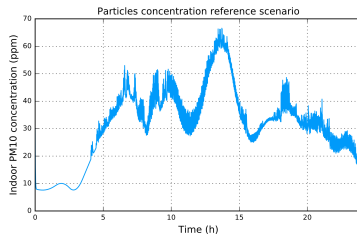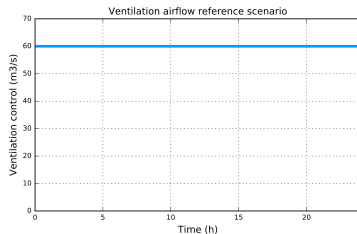

Optimized with SDP:

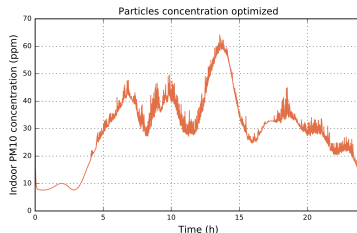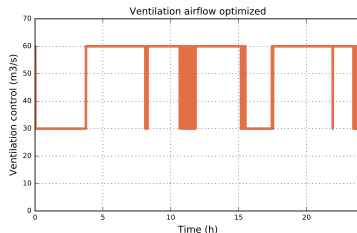

We are focusing on the battery

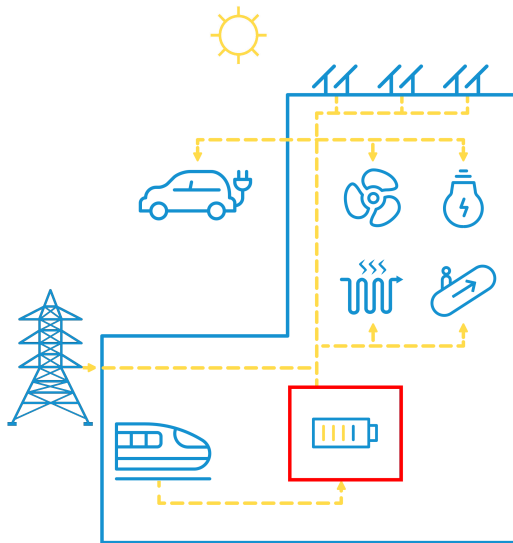

Efficacity © NEWords



efficacity
e

Outline


- 1 Improving energy efficiency of subway stations
 - Subway stations energy mix
 - Energy management system
- 2 Stochastic optimal batteries management
 - Battery intraday control
 - Investment management
 - Investment/Control decomposition
- 3 Time decomposition strategy and first results
 - Resolution method: Bilevel Stochastic Dynamic Programming
 - Preliminary numerical results



Batteries intraday control



Electrical network representation

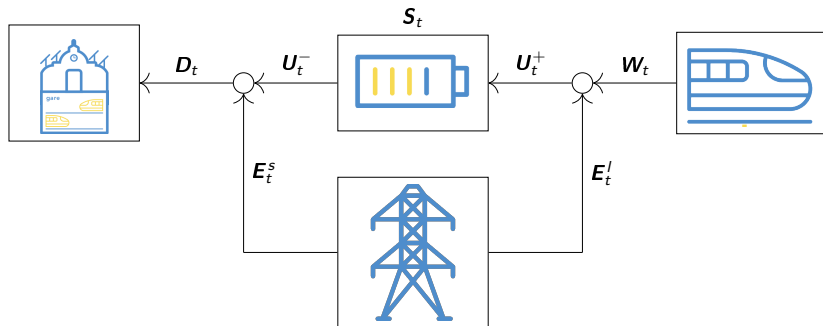

Station node

- D_t : Demand station
- E_t^s : Energy from grid to station
- U_t^- : Discharge battery

Subways node

- W_t : Braking energy
- E_t' : Energy from grid to battery
- U_t^+ : Charge battery

Intraday control problem

For a given battery we want a control maximizing the expected savings:

$$\begin{aligned} \max_{\mathbf{U}} \quad & \mathbb{E} \left[\sum_{t=0}^T c_t^e \underbrace{\left(\mathbf{U}_t^- - \mathbf{E}_t^I \right)}_{\text{saved energy}} \right] \\ \text{s.t} \quad & \left. \mathbf{S}_{t+1} = \mathbf{S}_t - \frac{1}{\rho_d} \mathbf{U}_t^- + \rho_c \text{sat}(\mathbf{U}_t^+ \vee \mathbf{W}_t) \right\} \text{SOC dynamic} \\ & \alpha_m C \leq \mathbf{S}_t \leq \alpha_M C \quad \left. \right\} \text{SOC bounds} \\ & \mathbf{U}_t^+ - \mathbf{W}_t \leq \mathbf{E}_t^I \quad \left. \right\} \text{Supply/demand balance} \\ & 0 \leq \mathbf{D}_t - \mathbf{U}_t^- \quad \left. \right\} \text{No selling constraint} \\ & 0 \leq \mathbf{E}_t^I \quad \left. \right\} \text{No selling constraint} \\ & \mathbf{S}_0 = s_0 \quad \left. \right\} \text{Initial SOC} \end{aligned}$$



Investment management

Batteries investments valuation difficulties

- **Control strategy:** Daily savings and batteries aging depend on the way we control them
- **Market uncertainties:** Batteries and electricity costs are uncertain
- **Investment management uncertainties:** We can postpone our first investment, replace our batteries or abandon the project in reaction to market observation
- **External impacts:** Environmental incentives are not direct financial benefits




We maximize a finite horizon discounted expected cost

$$\max_{U., R.} \mathbb{E} \left[\sum_{t=0}^{T_{tot}} \underbrace{\gamma_t}_{\text{Discount rate}} \left(\underbrace{c_t^e \left(\underbrace{U_t^- - E_t^I}_{\text{Saved energy}} \right)}_{\text{Battery purchase cost}} - \underbrace{C_t^b R_t}_{\text{Battery purchase cost}} \right) \right]$$

$$T_{tot} = N \times T$$

Using our **energy savings** to **cover our investments**

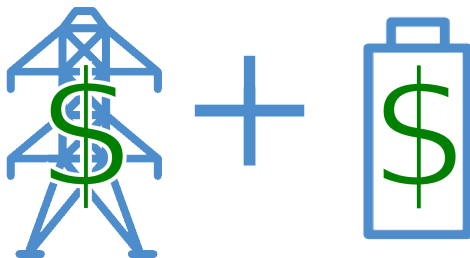

Controlling the batterie state of charge S_t

$$S_{t+1} = \chi_{R_t} \left(\underbrace{S_t}_{SOC} - \underbrace{\frac{1}{\rho_d} U_t^-}_{Discharge} + \rho_c \underbrace{sat(U_t^+ \vee W_t)}_{Charge} \right) + \underbrace{S_t^{ini}(R_t)}_{SOC_0 \text{ at replacement}}$$

$$\chi_{R_t} = \mathbb{1}_{R_t=0}$$



The batterie state of health H_t


$$H_{t+1} = \chi_{R_t} \left(\underbrace{H_t}_{SOH} - \underbrace{U_t^- - \text{sat}(U_t^+ \vee W_t)}_{\text{Exchanged energy}} \right) + \underbrace{H_t^{ini}(R_t)}_{SOH_0 \text{ at replacement}}$$



R.I.P

The batterie capacity C_t renewal/purchase

$$C_{t+1} = \underbrace{\chi R_t}_{\text{Current battery capacity}} + \underbrace{R_t}_{\text{New battery purchase}}$$



Ensuring some states/control constraints

$$\underbrace{\alpha_m \mathbf{C}_t \leq \mathbf{S}_t \leq \alpha_M \mathbf{C}_t, 0 \leq \mathbf{H}_t}_{\text{SOC and health bounds}}$$


$$\underbrace{U_t^+ - W_t \leq E_t^I, 0 \leq E_t^I, 0 \leq D_t - U_t^-}_{\text{Supply/Demand balance}}$$

$$\underbrace{\mathbf{S}_0 = s_0, \mathbf{C}_0 = c_0, \mathbf{H}_0 = h_0}_{\text{Initial state}}$$



And the non-anticipativity constraint

$$\sigma(\mathbf{U}_t), \sigma(\mathbf{R}_t) \subset \sigma(\mathbf{W}_0, \mathbf{C}_0^b, \dots, \mathbf{W}_{t-1}, \mathbf{C}_{t-1}^b)$$

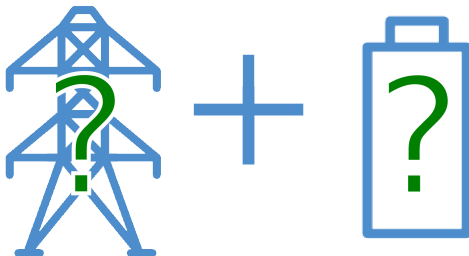

Investment/control problem

$$\max_{\mathbf{U}, \mathbf{R}} \mathbb{E} \left[\sum_{t=0}^{T_{tot}} \gamma_t \left(c_t^e \left(\mathbf{U}_t^- - \mathbf{E}_t^l \right) - \mathbf{C}_t^b \mathbf{R}_t \right) \right]$$

$$\text{s.t } \mathbf{S}_{t+1} = \chi_{\mathbf{R}_t} \left(\mathbf{S}_t - \frac{1}{\rho_d} \mathbf{U}_t^- + \rho_c \text{sat}(\mathbf{U}_t^+ \vee \mathbf{W}_t) \right) + S_t^{ini}(\mathbf{R}_t)$$

$$\mathbf{H}_{t+1} = \chi_{\mathbf{R}_t} \left(\mathbf{H}_t - \mathbf{U}_t^- - \text{sat}(\mathbf{U}_t^+ \vee \mathbf{W}_t) \right) + H_t^{ini}(\mathbf{R}_t)$$

$$\mathbf{C}_{t+1} = \chi_{\mathbf{R}_t} \mathbf{C}_t + \mathbf{R}_t$$

$$\alpha_m \mathbf{C}_t \leq \mathbf{S}_t \leq \alpha_M \mathbf{C}_t, \quad 0 \leq \mathbf{H}_t$$

$$\mathbf{U}_t^+ - \mathbf{W}_t \leq \mathbf{E}_t^l, \quad 0 \leq \mathbf{E}_t^l, \quad 0 \leq \mathbf{D}_t - \mathbf{U}_t^-$$

$$\mathbf{S}_0 = s_0, \quad \mathbf{C}_0 = c_0, \quad \mathbf{H}_0 = h_0$$

$$\sigma(\mathbf{U}_t), \sigma(\mathbf{R}_t) \subset \sigma(\mathbf{W}_0, \mathbf{C}_0^b, \dots, \mathbf{W}_{t-1}, \mathbf{C}_{t-1}^b)$$



Model assumptions

- Daily electricity contract: c_t^e is T -periodic
- No intraday battery renewal: $\forall t \neq kT, R_t = 0$
- Braking energy probability law is T -periodic:
Let $\xi_k^W = \left(w_t \right)_{t=t_k \dots t_k+T-1}$ then $(\xi_k^W)_{k \in 0, \dots, N}$ are i.i.d.
- Cost of batteries is constant intraday:
 $\forall k, \forall t \in \{kT, \dots, (k+1)T-1\}, C_t^b = C_{kT}^b$


We note k -th day first time step: $t_k = kT$



Investment/Control decomposition



Two decision time scales

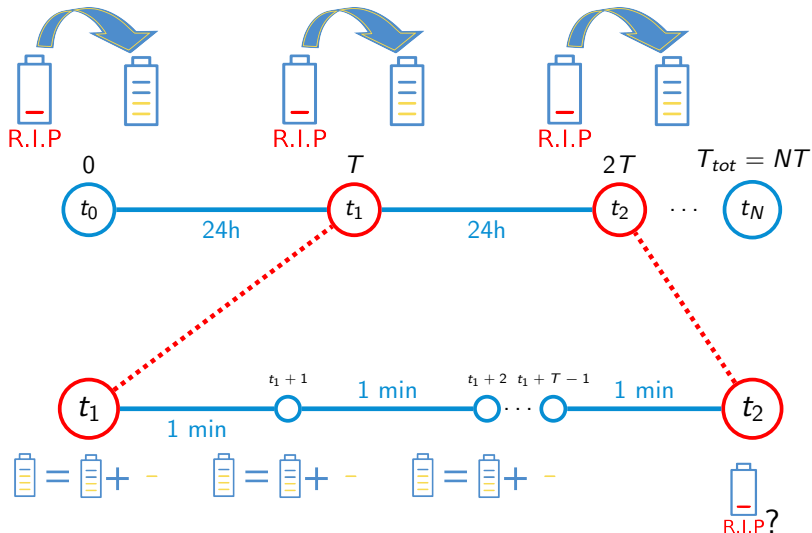

How to decompose the investment problem into:
an intraday control problem
and
a daily investment problem?



Outline

- 1 Improving energy efficiency of subway stations
 - Subway stations energy mix
 - Energy management system
- 2 Stochastic optimal batteries management
 - Battery intraday control
 - Investment management
 - Investment/Control decomposition
- 3 Time decomposition strategy and first results
 - Resolution method: Bilevel Stochastic Dynamic Programming
 - Preliminary numerical results



Resolution method: Bilevel Stochastic Dynamic Programming



Intraday control problem parametrized value function

$\forall k \in \{0, \dots, N\}$ we define:

$$Q_0^\mu(s_0, c_0, h_0; \mathbf{S}_d, \mathbf{H}_d) =$$

$$\max_{\mathbf{U}} \mathbb{E} \left[\sum_{t=t_k+1}^{t_{k+1}-1} c_t^e \left(\mathbf{U}_t^- - \mathbf{E}_t^l \right) \right]$$

$$\text{s.t. } \mathbf{S}_{t+1} = \mathbf{S}_t - \frac{1}{\rho_d} \mathbf{U}_t^- + \rho_c \text{sat}(\mathbf{U}_t^+ \vee \mathbf{W}_t)$$

$$\mathbf{H}_{t+1} = \mathbf{H}_t - \mathbf{U}_t^- - \text{sat}(\mathbf{U}_t^+ \vee \mathbf{W}_t)$$

$$\mathbf{U}_t^+ - \mathbf{W}_t \leq \mathbf{E}_t^l, \quad 0 \leq \mathbf{E}_t^l, \quad 0 \leq \mathbf{D}_t - \mathbf{U}_t^-$$

$$\alpha_m c_0 \leq \mathbf{S}_t \leq \alpha_M c_0$$

$$\mathbf{H}_d \leq \mathbf{H}_{t_{k+1}}, \quad \mathbf{S}_d \leq \mathbf{S}_{t_{k+1}}$$

$$\mathbf{S}_{t_k+1} = s_0, \quad \mathbf{H}_{t_k+1} = h_0$$

$$\sigma(\mathbf{U}_t) \subset \sigma(\mathbf{W}_{t_k+1}, \dots, \mathbf{W}_{t_{k+1}-1})$$



Investment/Control decomposition

As suggested by Heymann et al. [2] we can extend their lemma to the stochastic case:

$$\begin{aligned} V_{t_k}(s_{t_k}, c_{t_k}, h_{t_k}) &= \max_{U, R} \mathbb{E} \left[\sum_{t=t_k}^{T_{tot}} \gamma_t \left(c_t^e \left(U_t^- - E_t^I \right) - C_t^b R_t \right) \right] \\ &= \max_{U_{t_k}, R_{t_k}; S_F, H_F} \mathbb{E} \left[\underbrace{\gamma_{t_k} c_{t_k}^e (U_{t_k}^- - E_{t_k}^I)}_{\text{elec savings}} - \underbrace{\gamma_{t_k} C_{t_k}^b R_{t_k}}_{\text{battery renewal}} \right. \\ &\quad + \underbrace{\gamma_{t_k} Q_0^\mu(S_{t_k+1}, C_{t_k+1}, H_{t_k+1}; S_F, H_F)}_{\text{intraday value}} \\ &\quad \left. + \underbrace{V_{t_k+1}(S_F, C_{t_k+1}, H_F)}_{\text{future investment cost}} \right] \end{aligned}$$



Remarks

- We need to assume time independence of the \mathbf{C}_t^b
- We need monotonicity assumptions:
 - ▶ Full battery is always preferable: $s \mapsto V_{t_k}(s, \cdot, \cdot)$ is non-increasing
 - ▶ Healthy battery is always preferable: $h \mapsto V_{t_k}(\cdot, \cdot, h)$ is non-increasing
- \mathbf{S}_F and \mathbf{H}_F are mappings: $\sigma(\mathbf{S}_F), \sigma(\mathbf{H}_F) \subset \sigma(\mathbf{C}_{t_k}^b, \xi_k^W)$



Preliminary numerical results




Synthetic data

- Maximum exangeable energy: model proposed in Haessig et al. [1]

$$E_{exch} = 2E_{rated} * N_{cycles}$$

- Discount rate: 4.5%
- Batteries cost stochastic model: **synthetic scenarios** that approximately coïncides with **market forecasts**

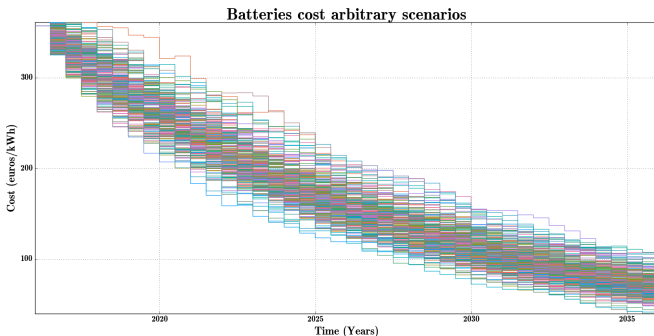

Comparison

We compare 3 investment strategies over 20 years, 100 C^b scenarios, 1 single capacity (80 kWh)

Straightforward approach, investment/control independence:

- Strategy 1: Buy now, replace when battery is dead, ignore aging

Bilevel Stochastic Dynamic Programming:

- Strategy 2: Buy now, replace when battery is dead, control aging
- Strategy 3: Start investment and buy batteries anytime, control aging



Preliminary results

- Cost 1 = -7000 euros \Rightarrow do not invest!
- Cost 2 = +12000 euros \Rightarrow do not strain your first batteries!
- Cost 3 = +33000 euros \Rightarrow start investment in 2020 and do not strain your first batteries!

	SDP	BSDP
Offline comp. time	∞ (out of memory)	16min
Online comp. time	?	[0s,1s]
Simulation comp. time	?	[20s,30s]
Lower bound	?	+38k

In Julia with a Core I7, 2.6 Ghz, 8Go ram + 12Go swap SSD



Conclusion

Our study leads to the following conclusions:

- Controlling aging matters
- BSDP provides encouraging results
- BSDP can be used for aging aware intraday control



Ongoing work

We are now focusing on:

- Confirming, developing and improving BSDP results
- Improving risk modelling
- Improving batteries cost stochastic model
- Improving aging model
- Include environmental incentives (particulate matters)
- Apply the method to more complex energy efficiency investments



References



Pierre Haessig.

Dimensionnement et gestion d'un stockage d'énergie pour l'atténuation des incertitudes de production éolienne.

PhD thesis, Cachan, Ecole normale supérieure, 2014.



Benjamin Heymann, Pierre Martinon, and Frédéric Bonnans.

Long term aging : an adaptative weights dynamic programming algorithm.

working paper or preprint, July 2016.

